





Heradesign[®] baffles

Table 23

Product ¹⁾	Size mm	Thickness/(composition) ²⁾ mm	Edge design	Weight kg/piece
Heradesign [®] <i>superfine</i>	1200/600	57 (15 / 25 / 15)	Metal frame	12.9
	1200/300	57 (15 / 25 / 15)		6.4
Heradesign [®] <i>fine</i>	1200/600	57 (15 / 25 / 15)		13.5
	1200/300	57 (15 / 25 / 15)		6.7


¹⁾ On request also available with Heradesign superfine A2 and Heradesign fine A2.

²⁾ Individual thicknesses of acoustic layers (outside) and mineral wool core (inside).

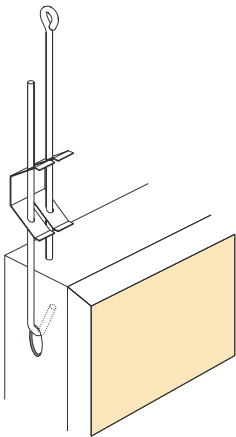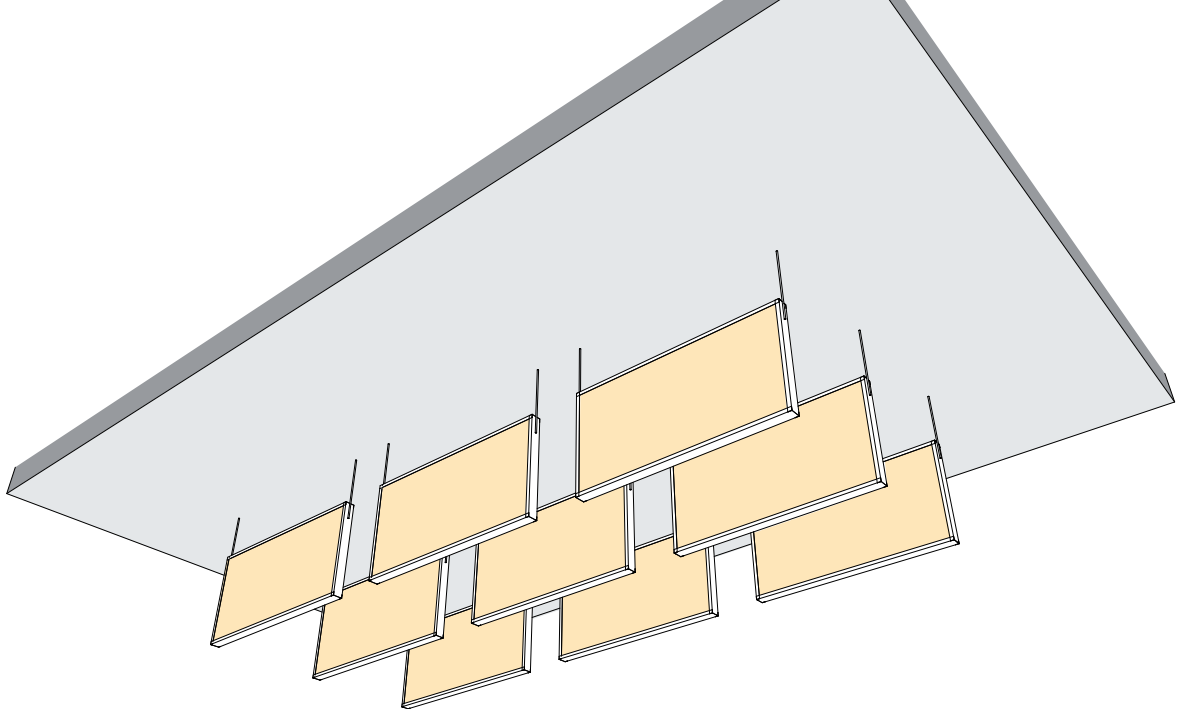


Fastening with quick hanger with two hooks

Fastening with quick hanger with two hooks and hanging wire (ø 4 mm) with eyelet, boring ø 6 mm. Allowable load per hanger: 0.25 kN as per DIN 18163



Fastening with load-bearing tracks and quick hanger

Fastening with tracks and quick hanger with tension spring and hanging wire. The hanging wire is led with a disc in the load-bearing track. The tension spring can be fastened on the baffle frame according to Detail 1 or 2. Allowable load per hanger: 0.25 kN as per DIN 18163

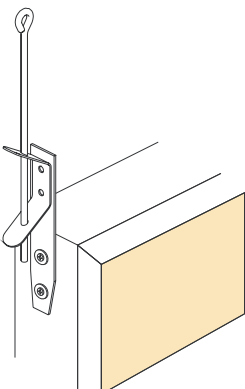

Fastening with quick hanger with tension spring

Fastening with quick hanger with tension spring and hanging wire (ø 4 mm) with eyelet, attachment with two self-drilling screws per quick hanger on the baffle frame. Allowable load per hanger: 0.25 kN as per DIN 18163