


Rockfon® Cinema Black™

FEATURES & BENEFITS

- Factory painted glass scrim
- Good sound absorption (NRC = 0.85 0.95)
- High fire performance
- Lightweight panel, easy to carry and install
- Available in square lay-in

APPLICATIONS

- Cinema
- Auditorium

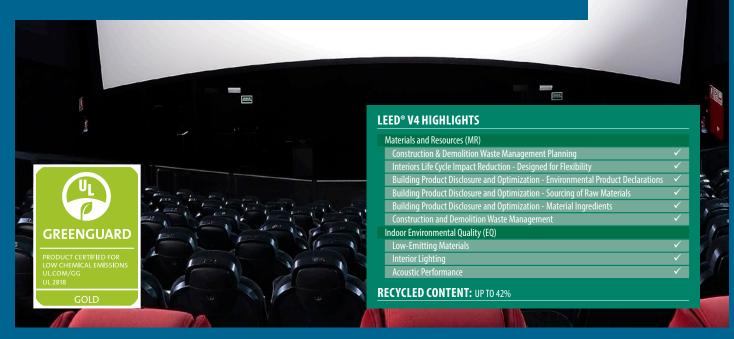



Rockfon® Cinema Black™

















Edge designation		Item number	Modular size (nominal)	lbs/ sqft	sqft/ carton	NRC	CAC	AC	Fire Class	Light Reflectance	Sag resistance (relative humidity)	LOW VOC
Square Lay In	SQ	1200	2' x 2' x 5/8"	0.38	112	0.85	-	-	А	0.04	UPTO 100%	✓
	SQ	1201	2' x 4' x 5/8"	0.38	112	0.85	-	-	А	0.04	UP TO 100%	✓
	SQ	1210	2' x 2' x 1"	0.45	64	0.95	-	-	А	0.04	UP TO 100%	✓
	SQ	1211	2' x 4' x 1"	0.45	64	0.95	-	-	Α	0.04	UP TO 100%	✓

MATERIAL

Stone wool (Mineral Wool) ceiling tiles with factory painted glass scrim surface

ASTM E1264 CLASSIFICATION: Type XX - Stone wool base with membrane-faced overlay, Pattern G



FIRE PERFORMANCE:

Surface burning characteristics:

UL723 (ASTM E84) Flame Spread Index: 5 Smoke Developed Index (UL Labeled): 0 CAN/ULC S102 Flame Spread Index: 15 Smoke Developed Index: 5



ENVIRONMENT

Fully recyclable



THERMAL INSULATION

R Value (BTU Units): 2.2 - 3.5 RSI Value (Watts Units): 0.39 - 0.62



VOC/FORMALDEHYDE EMISSIONS

All Rockfon stone wool acoustic solutions are GREENGUARD Gold low VOC certified and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.

Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen.



WARRANTY **INFORMATION:**

30-Year Limited Product Warranty. See www.rockfon.com



HYGIENE

Stone wool provides no sustenance to microorganisms



CLEANING

Vacuum